


DECOMESH / MESH GLASS

Obsidia CBK

■■■ Architectural Laminated Glass with Mesh Interlayer

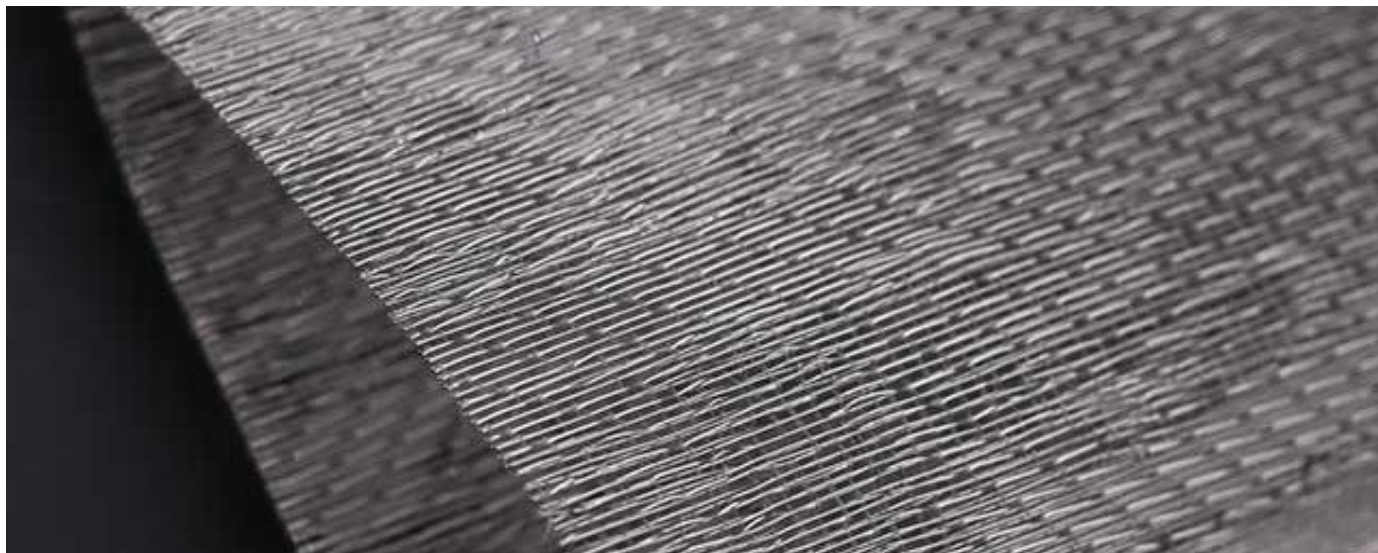

TOTAL THICKNESS

0.5 mm

OPEN AREA

20%

AVAILABLE SPECIFICATIONS

Type	Material	Wire Diameter	Open Area	Thickness	Max Width	Weight (kg/m ²)
DM-OBSIDIA-CBK	Stainless Steel	Ø 0.26 mm	20%	0.5 mm	2500 mm	1.6 kg/m ²

APPLICATIONS

- ◆ Glass partitions
- ◆ Balustrades & railings
- ◆ Doors & enclosures
- ◆ Wall cladding & feature panels

GLASS & FINISHES

GLASS OPTIONS

Clear float · Low-iron · Tinted / coated

INTERLAYER FILM

Clear PVB · Coloured PVB · EVA · Acoustic PVB