


LINEAR MESH / MESH GLASS

Luxara AG

■■■ Architectural Laminated Glass with Mesh Interlayer

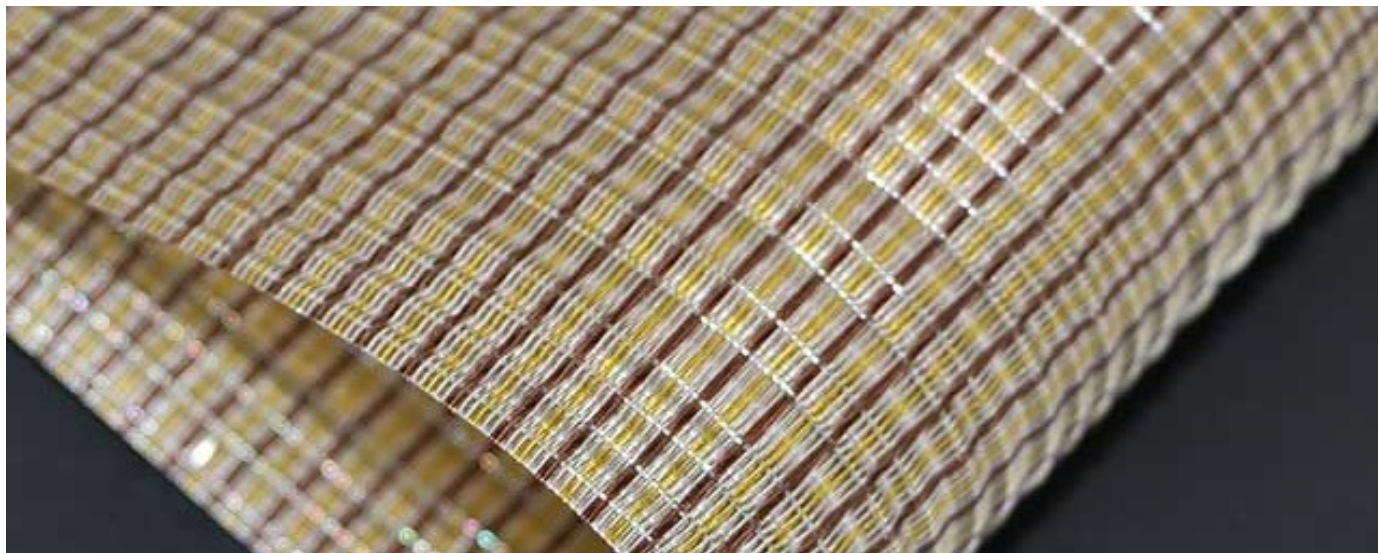

TOTAL THICKNESS

0.6 mm

OPEN AREA

0%

AVAILABLE SPECIFICATIONS

Type	Material	Wire Diameter	Open Area	Thickness	Max Width	Weight (kg/m ²)
LM-LUXARA-AG	Stainless Steel &	Ø 0.26 mm	0%	0.6 mm	2500 mm	2.36 kg/m ²

APPLICATIONS

- ◆ Glass partitions
- ◆ Balustrades & railings
- ◆ Doors & enclosures
- ◆ Wall cladding & feature panels

GLASS & FINISHES

GLASS OPTIONS

Clear float · Low-iron · Tinted / coated

INTERLAYER FILM

Clear PVB · Coloured PVB · EVA · Acoustic PVB